

# The XTE-motion® tool

## The XTE-motion® dispenser



# Striqta® stretch film

The specially formulated Striqta® stretch film is offered in 3 variations:

Striqta® 500 A roll of 450 mm wide Striqta® stretch film that will give you 500 meters applied film.

Striqta® 750 A roll of 450 mm wide Striqta® stretch film that will give you 750 meters applied film.

Striqta® 1000 A roll of 450 mm wide Striqta® stretch film that will give you 1000 meters applied film.


Striqta® is available in:

crystal clear  
black opaque  
tinted blue  
white opaque

Tinted or opaque colors on request.

## Loading the Striqta® stretch film in the dispenser

The Striqta® stretch film is stretched in the XTE-motion® dispenser by the 2 black, grooved rollers. The rollers have a different speed to achieve the stretch. It's important to feed the film as shown in the picture below.

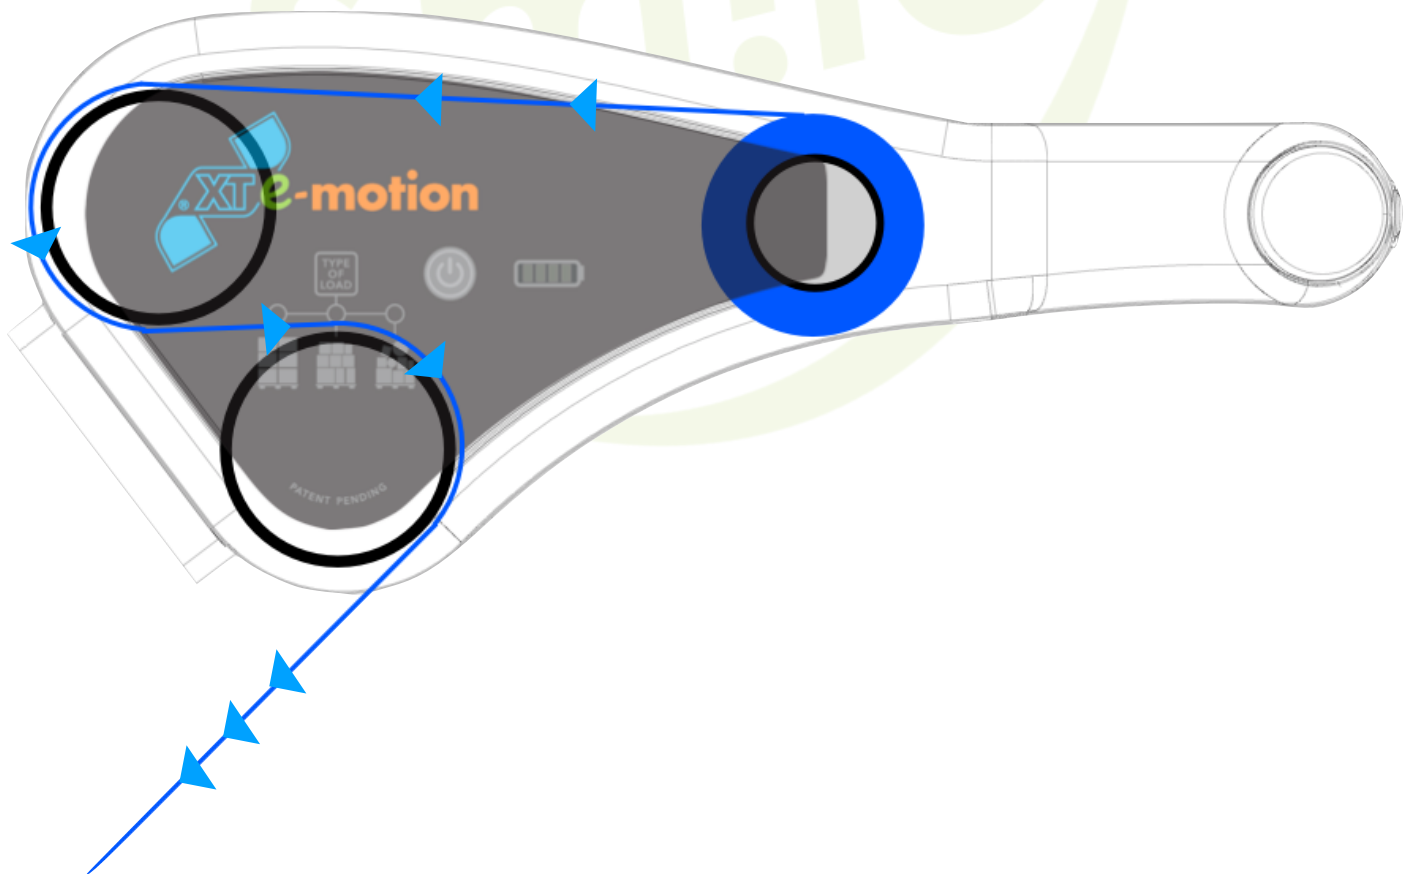

The XTE-motion® dispenser has a quick load system for the roll of Striqta® film.

### Step 1:

#### Switch the XTE-motion® dispenser OFF

Push the roll of Striqta® film in the spring loaded collet in the top of the dispenser.  
Then move the bottom of the roll over the bottom collet.



### Step 2:

Make a small strap of the end of the Striqta® film.  
Move this strap through the opening in the middle of the black rollers



### STEP 3:

#### Switch the XTE-motion® dispenser ON

Pull the film in forward direction. The motor of the XTE-motion® dispenser will start and help you to feed the film.  
Once you have enough film, just stop pulling to stop the motor.



# How to wrap a pallet

If the XTE-motion® app you can calculate the number of wraps to apply on top and bottom of the pallet, based on the weight and stacking pattern. (see the next chapter)

The most convenient way is to start at the top of the pallet load. Find a spot between boxes or products to connect the film to the load.

Walk in clockwise direction with the control panel of the XTE-motion® dispenser facing upwards.

After wrapping the advised number of top wraps you move the tool downwards and overlap the layers according the advice.

Apply the necessary wraps around the base of the pallet and move up fast.

Cut the film by punching it with your fingers.

Always leave minimum of 50 cms length of loose film outside of the dispenser. This allows for an easy start of the next pallet wrap

